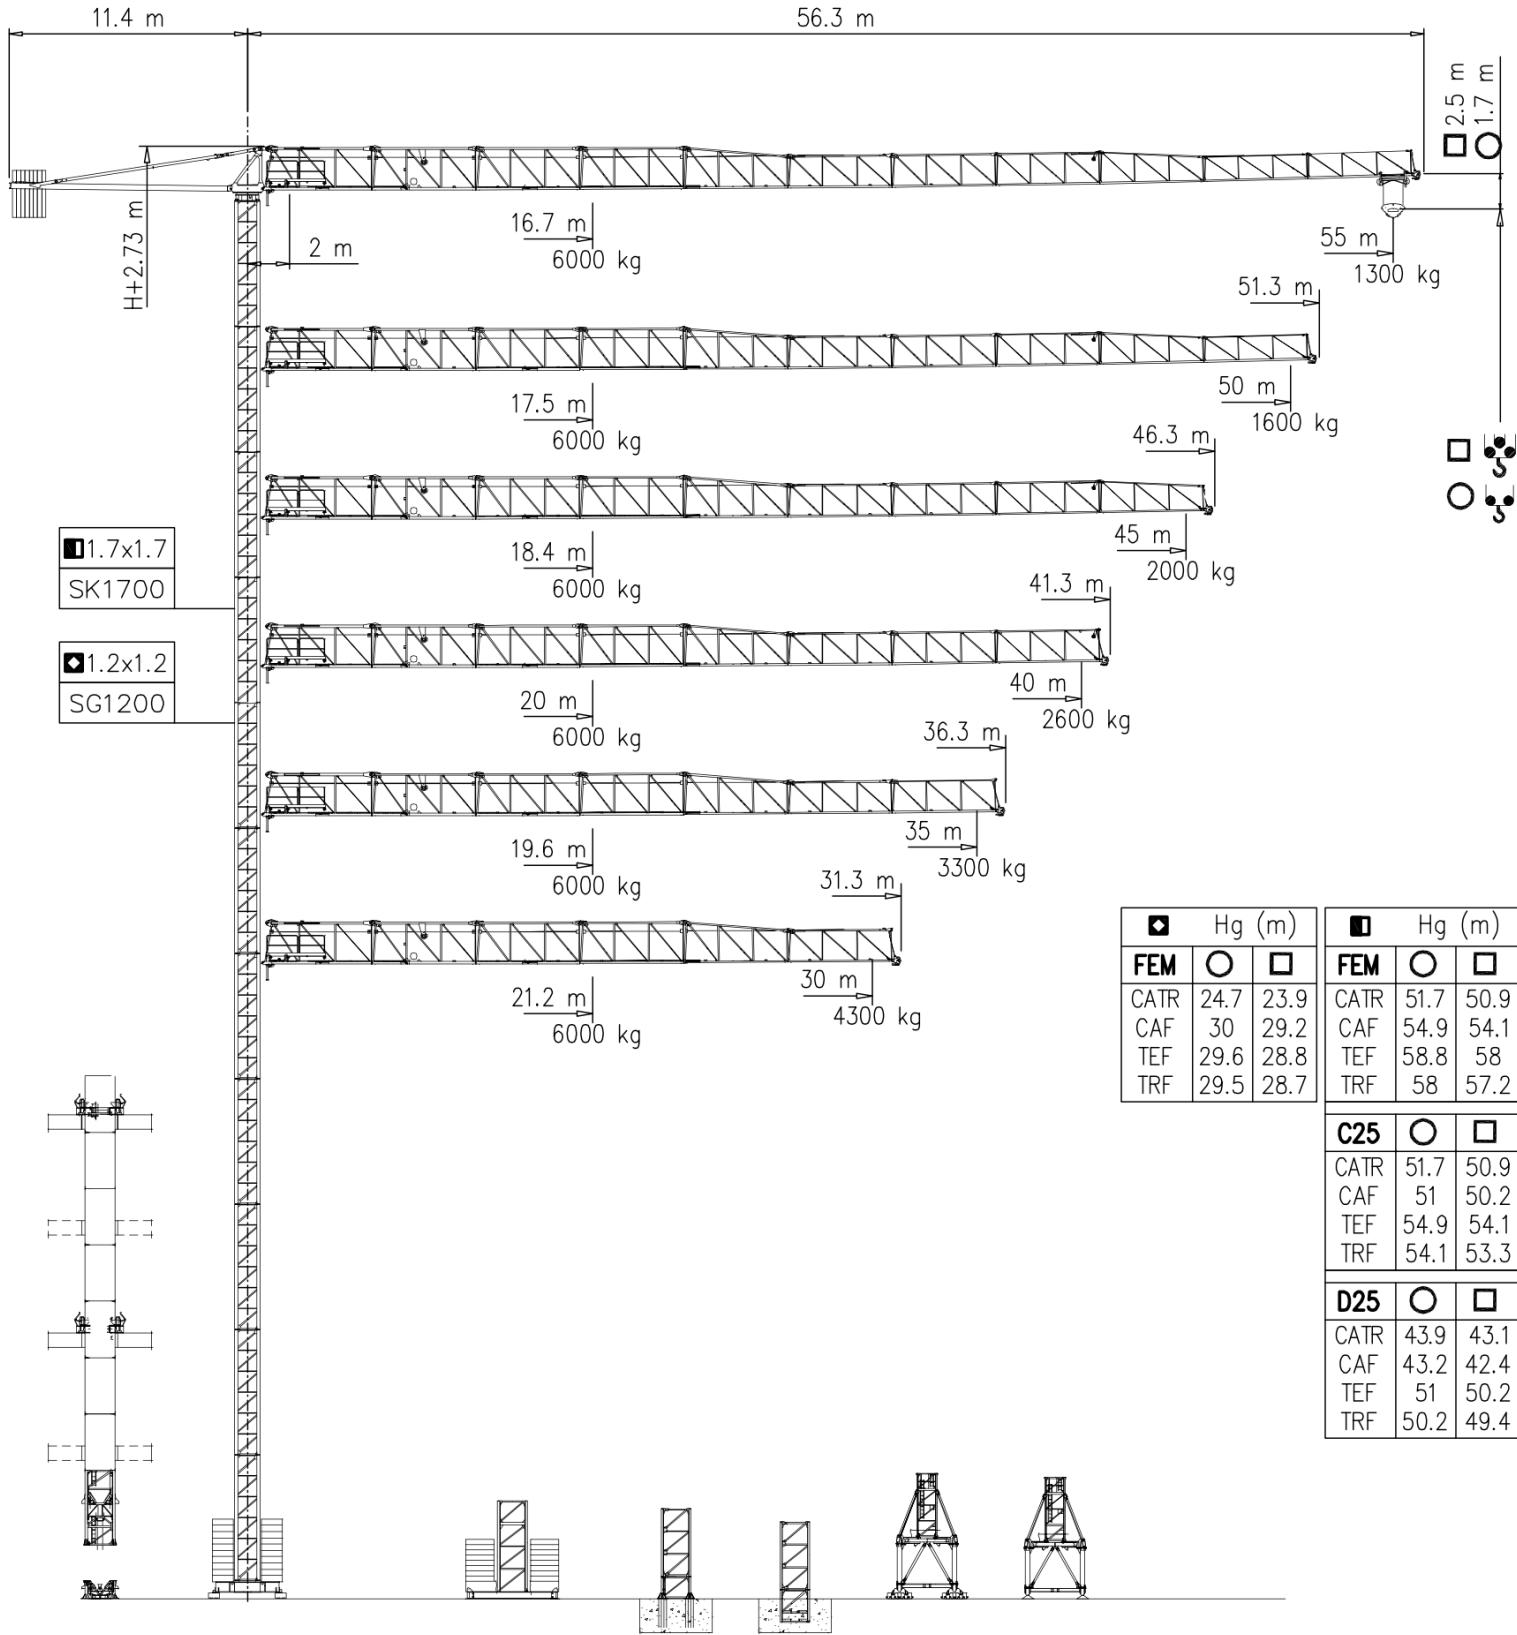


# AFM Gru 1355 TLX P6



FEM	Hg (m)		FEM	Hg (m)	
	○	□		○	□
CATR	24.7	23.9	CATR	51.7	50.9
CAF	30	29.2	CAF	54.9	54.1
TEF	29.6	28.8	TEF	58.8	58
TRF	29.5	28.7	TRF	58	57.2

C25	○	□
CATR	51.7	50.9
CAF	51	50.2
TEF	54.9	54.1
TRF	54.1	53.3

D25	○	□
CATR	43.9	43.1
CAF	43.2	42.4
TEF	51	50.2
TRF	50.2	49.4



CATR  
 CATC

CAF

TEF

TRF













PRT-TR

PRT













# AFM Gru 1355 TLX P6

Curve di carico – Courbes de charges – Load diagrams – LastKurven – Curvas de cargas

Pmax 3000 kg

	16800 kg		2	29.5	32.5	35	37.5	40	42.5	45	47.5	50	52.5	55	m	
		55 m	<b>3000</b>	3000	2750	2510	2310	2120	1970	1850	1690	1580	1450	1300	kg	
	14400 kg		2	30.9	32.5	35	37.5	40	42.5	45	47.5	50	m			
		50 m	<b>3000</b>	3000	2960	2700	2480	2290	2120	1970	1830	1600	kg			
	12000 kg		2							32.8	35	37.5	40	42.5	45	m
		45 m	<b>3000</b>							3000	2940	2720	2500	2300	2000	kg
	10800 kg		2							35.7		40	m			
		40 m	<b>3000</b>							3000		2600	kg			
	10800 kg		2							35		m				
		35 m	<b>3000</b>							3000		kg				
	9600 kg		2							30	m					
		30 m	<b>3000</b>							3000	kg					



Pmax 6000/3000 kg

	16800 kg		2	16.7	17.5	20	22.5	25	27.5	30	32.5	35	37.5	40	42.5	45	47.5	50	52.5	55	m			
		55 m	<b>6000</b>	6000	5640	4850	4250	3760	3370	3000	2750	2510	2310	2120	1970	1850	1690	1580	1450	1300	kg			
	14400 kg		2							17.5	20	22.5	25	27.5	30	32.5	35	37.5	40	42.5	45	47.5	50	m
		50 m	<b>6000</b>							6000	5200	4550	4030	3610	3250	2960	2700	2480	2290	2120	1970	1830	1600	kg
	12000 kg		2							18.4	20	22.5	25	27.5	30	32.5	35	37.5	40	42.5	45	m		
		45 m	<b>6000</b>							6000	5600	4920	4350	3900	3530	3210	2940	2720	2500	2300	2000	kg		
	10800 kg		2							20	22.5	25	27.5	30	32.5	35	37.5	40	m					
		40 m	<b>6000</b>							6000	5480	4860	4370	3950	3600	3300	3000	2600	kg					
	10800 kg		2							19.6	25	27.5	30	32.5	35	m								
		35 m	<b>6000</b>							6000	5250	4740	4260	3900	3300	kg								
	9600 kg		2							21.2	25	27.5	30	m										
		30 m	<b>6000</b>							6000	5700	5000	4300	kg										

# AFM Gru 1355 TLX P6

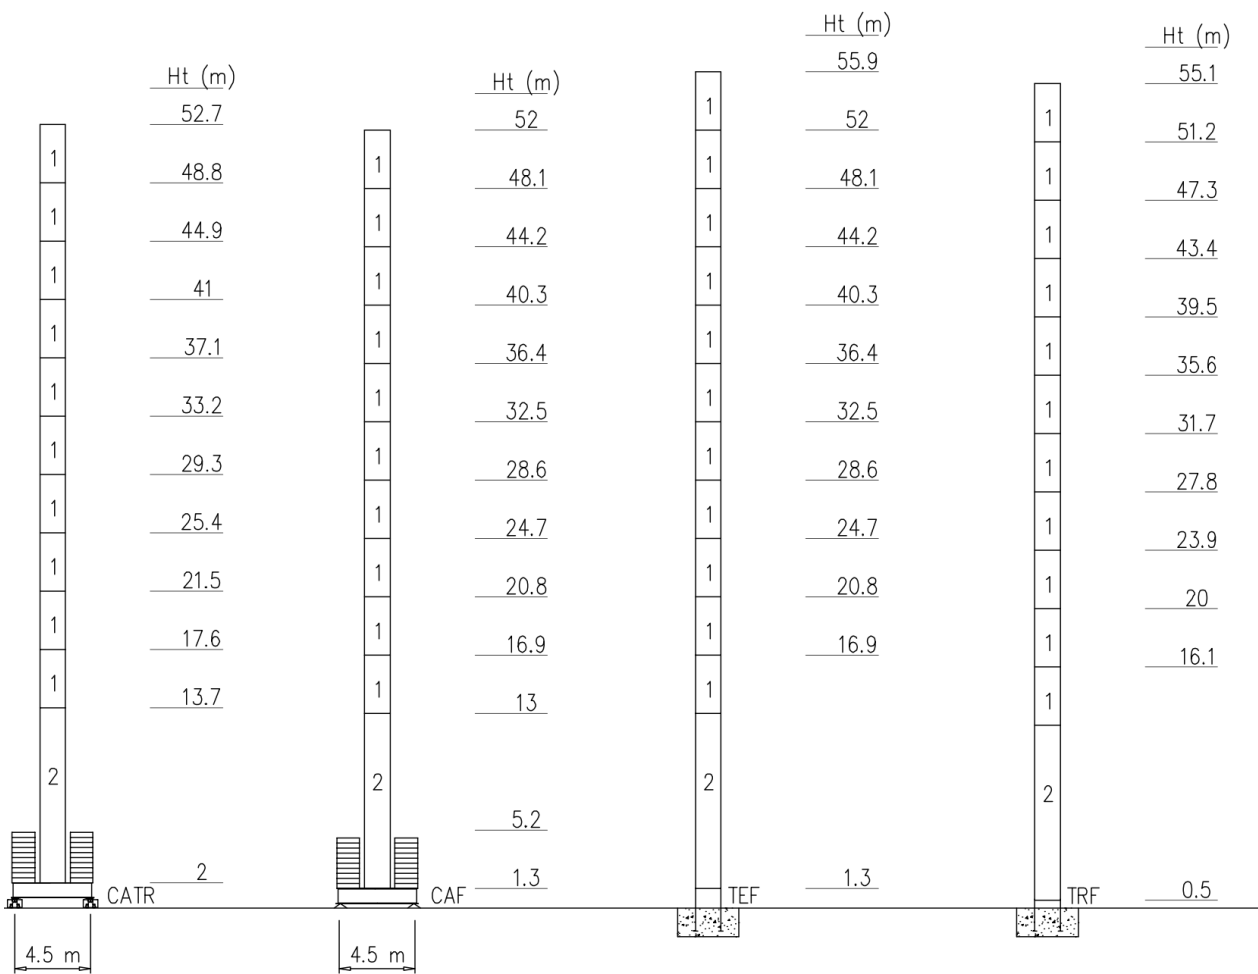
Torre/Reazioni – Masts/Reactions – Mat/Réactions – Maste/Eckdrücke – Mástil/Reacciones – Tramo/Reacções

SK1700 EN14439-C25




4	BPF039	4/4
3	ST117	2/2
2	BAF117	4/2
1	ST039	2/2



- Hg=Ht-1 m
- Hg=Ht-1.8 m



Peso zavorra – Ballast weight – Poids du lest – Ballastgewicht – Peso de lastre

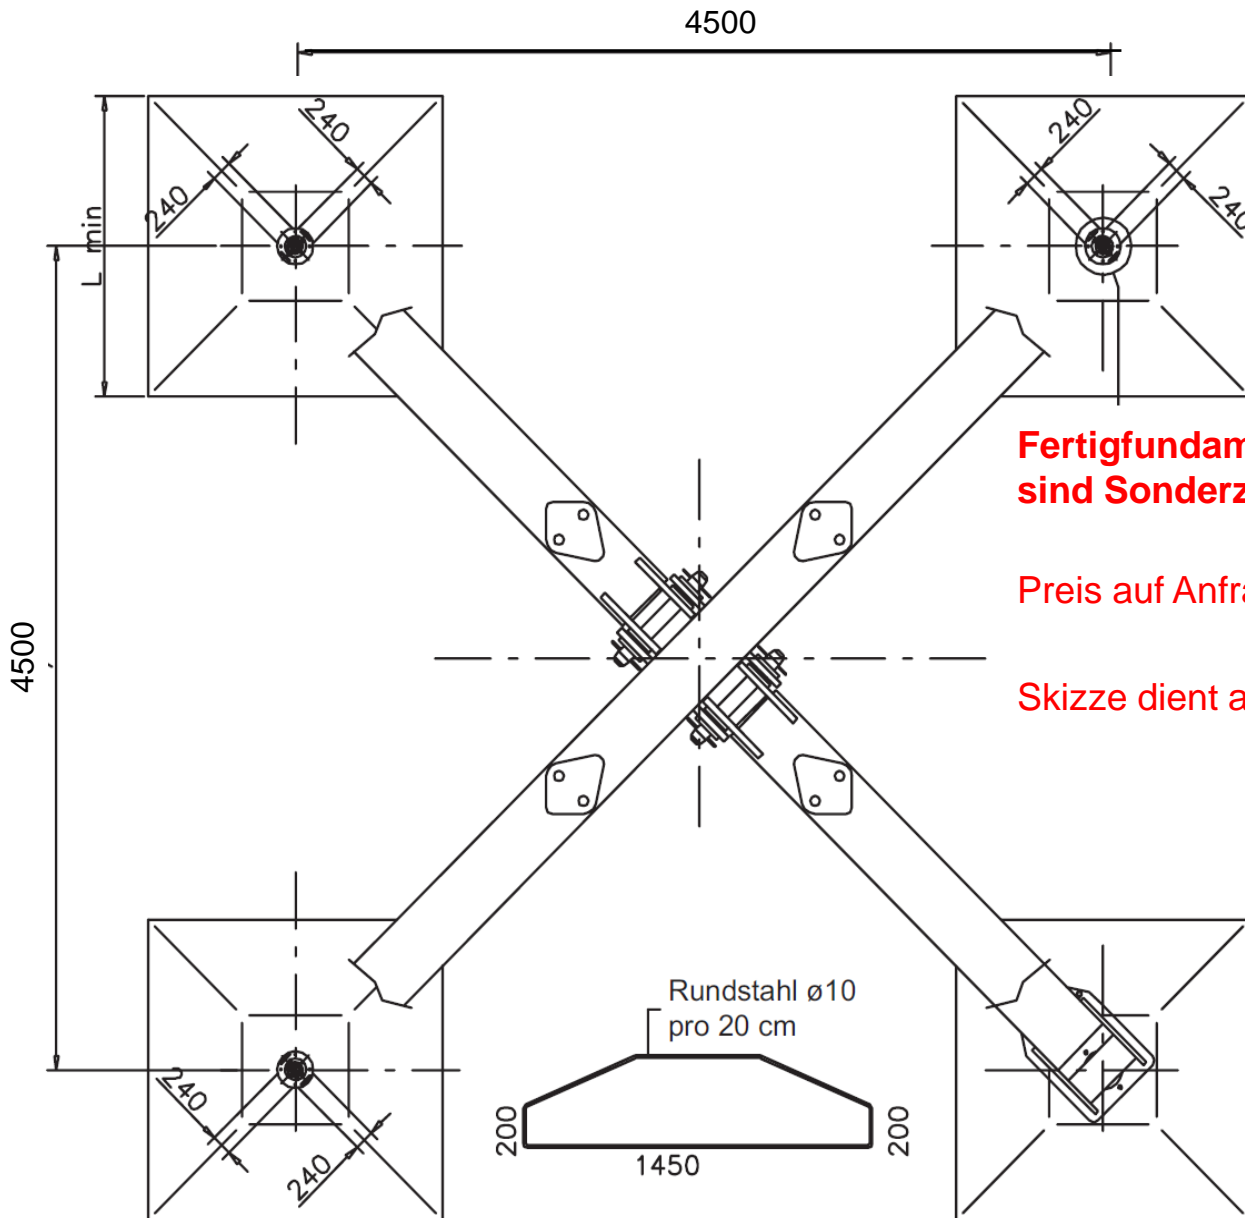


SK1700			
H-CATR (m)	37.1	48.8	52.7
(t)	70	119	126
n*	20xA	34xA	36xA



SK1700								
H-CAF (m)	24.7	28.6	32.5	36.4	40.3	44.2	48.1	52
(t)	63	63	63	63	84	98	112	126
n*	18xA	18xA	18xA	18xA	24xA	28xA	32xA	36xA

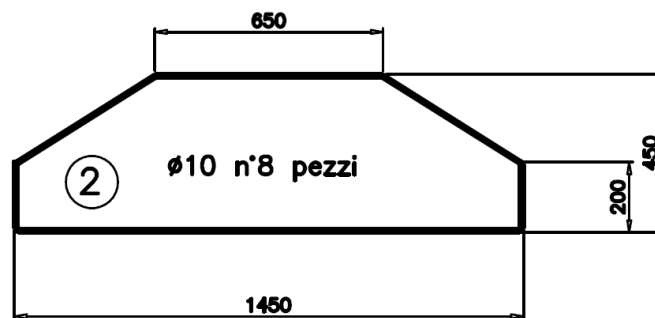
# AFM Gru 1355 TLX P6



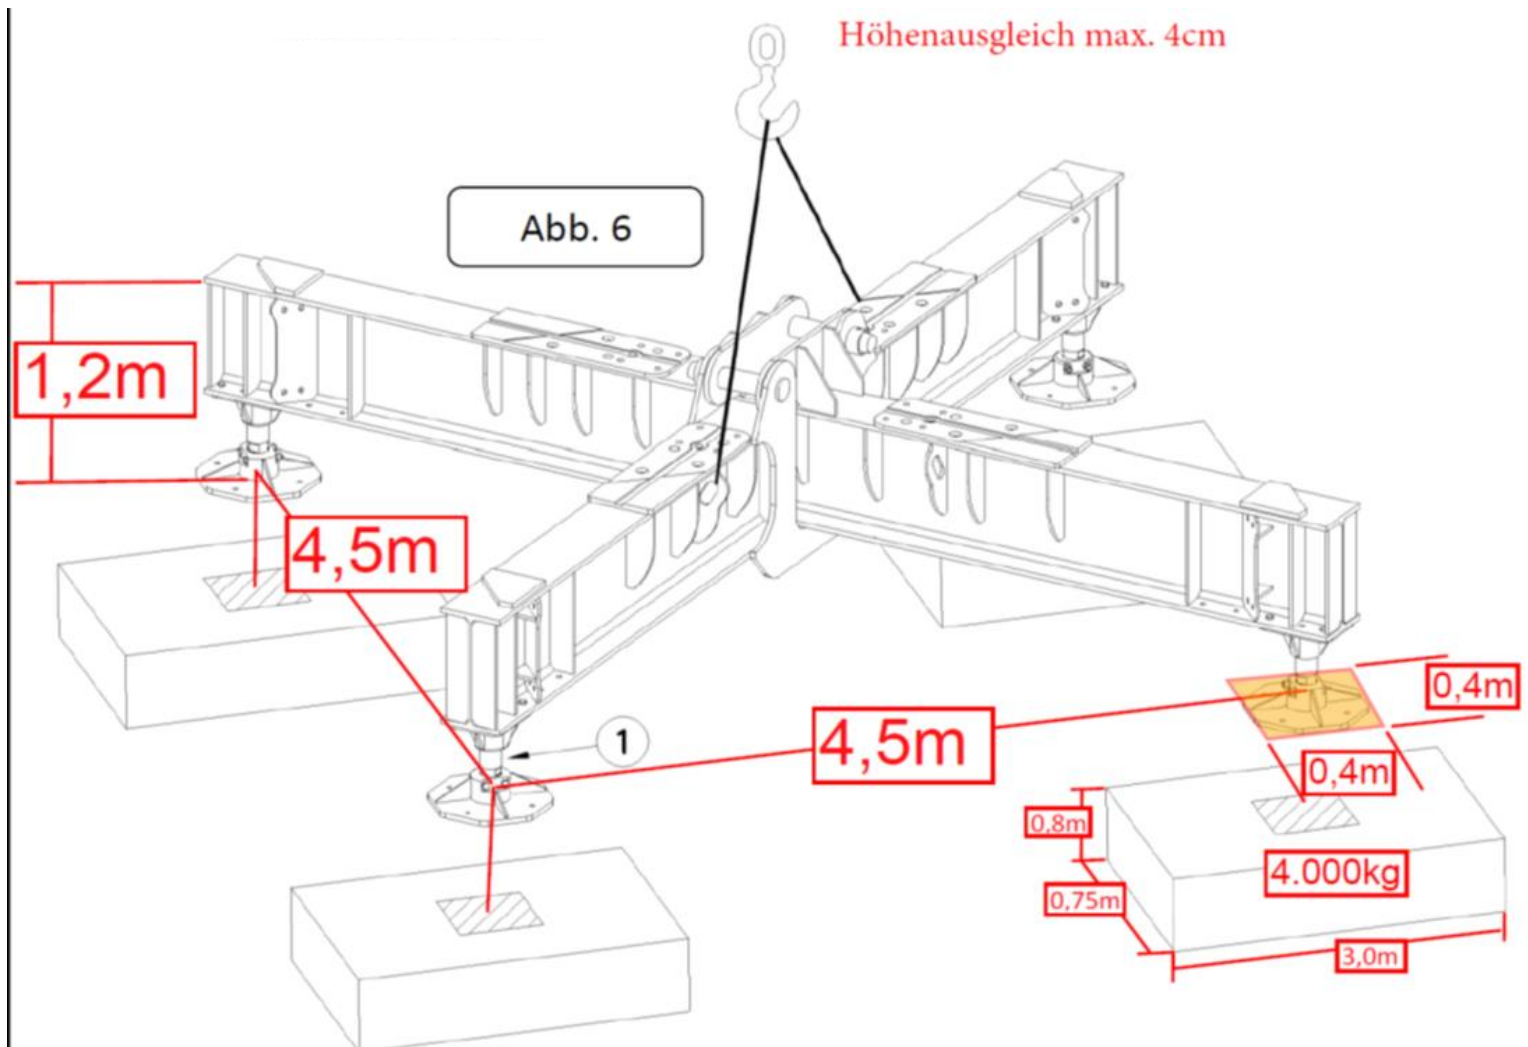
**Fertigfundamentfüsse  
sind Sonderzubehör.**

**Preis auf Anfrage.**

**Skizze dient als Beispiel.**



# AFM Gru 1355 TLX P6



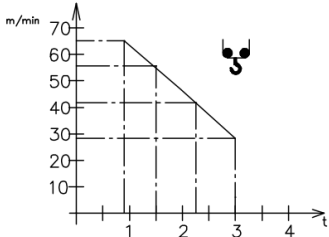
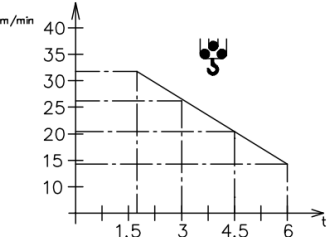



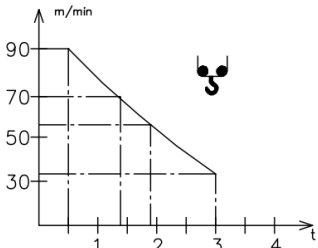
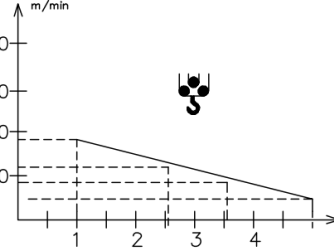
















**Bis max 30,9 m Höhe zu verwenden.**



# AFM Gru 1355 TLX P6

Meccanismi – Mechanisms – Mécanismes – Antriebe – Mecanismos

Sollevamento V25.60 Hoisting Levage Heben Elevaciòn Elevação													V25.60	
	m/min	7	18	28	42	56	65	3.5	9	14	21	28	32.5	18.4 kW
	t	3	3	3	2.25	1.5	0.9	6	6	6	4.5	3	1.8	37 kVA
													 172 m 344 m (L)	
Sollevamento V33.90 Hoisting Levage Heben Elevaciòn Elevação													V33.90	
	m/min	3	18	34	54	70	90	1.5	9	17	27	35	45	22 kW
	t	3	3	3	1.8	1.3	0.5	6	6	6	3.6	2.6	1	47 kVA
													 380 m 760 m (L)	
Sollevamento V45.120 Hoisting Levage Heben Elevaciòn Elevação													V45.120 33 kW 57 kVA	
	m/min	4	18	40	64	90	120							
	t	3	3	3	1.9	1.1	0.6							
													340 m 680 m (L)	
	m/min	2	9	20	32	45	60							
t	6	6	6	3.8	2.2	1.2								
Carrello Trolleying Distribution Katzfahren Distribuciòn Distribuição			0 → 55	m/min	3 kW	Potenza elettrica necessaria Puissance électrique nécessaire Necessary electric power Anschlusswert   Potencia								
Rotazione Slewing Orientation Schwenken Orientaciòn Rotação			0 → 0,9	giri/min tr/min rp/min	4.4 kW @ 1200rpm n* 2 x 2.2 kW									
Traslazione Travelling Translation Kranfahren Traslaciòn Tranlação			0 → 20	m/min	3.7 kW									
Rete elettrica – Réseau – Mains supply – Netzstrom – Red – Rede electrica										400V – 50 Hz				